




Galvanized Wire Braided Oil





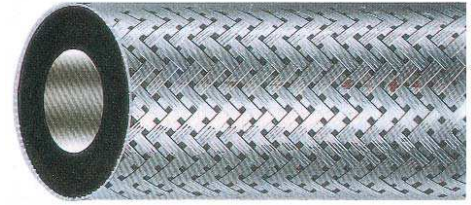




 TUBE : OIL AND FUEL RESISTANT NBR RUBBER.
 COVER : GALVANIZED WIRE BRAID.
 APPLICATION : FOR DELIVERY OF TRANSMISSION OIL, FUEL OIL, GASOLINE, ETC.

 SEELE : ÖL-UND KRAFTSTOFFBESTÄNDIG, NBR-GUMMI.
 DECKE : MIT VERZINKTEM STAHLDRAHTGEFLECHT.
 ANWENDUNG : ZUM DURCHLEITEN VON KRAFTSTOFFEN WIE ÖL, GAS, HEIZÖL ETC.

 SOTTOSTRATO : GOMMA SINTETICA NBR, RESISTENTE AI PRODOTTI PETROLIFERI.
 COPERTURA : TRECCIA ZINCATO.
 IMPIEGO : PER MANDATA D'OLIO, BENZINA, GASOLIO E DI LUBRIFICANTI ETC.

 TUBE : CAOUTCHOUC NBR, RESISTANT AUX HUILES ET HYDROCARBURES.
 REVETEMENT : TRESSE GALVANISEE.
 APPLICATION : POUR REFOULEMENT DES HUILES ET DES HYDROCARBURES.

 ID	 OD	 WP		 BP		 BR/r	 W	 L
		bar	psi	bar	psi			
mm	mm					mm	g/m	m
5	10	25	365	75	1088	25	80	100
6	11	25	365	75	1088	30	90	100
8	13	25	365	75	1088	40	115	100
9	14	25	365	75	1088	45	125	100
10	15	25	365	75	1088	50	135	100
13	19	20	290	60	870	65	185	100
16	22	20	290	60	870	80	290	50
19	25	15	218	45	653	95	330	50
25	33	15	218	45	653	125	500	50



-35°C /+ 90°C
 -31°F /+194°F

NORMS
 NORMEN
 NORME
 NORMES

ISO 1307

COLOUR
 FARBEN
 COLORI
 COULEUR

